

NTW - NTD

Professional
Stacked washer-dryer and stacked dryer

STACKED WASHER-DRYER UNITS FEATURES

- Fully programmable control
- Totally freestanding: can be installed on any floor and any level
- Reduced floor space
- Top, front and side panels standard available in anthracite grey
- Door opens 180° for easy loading and unloading
- LED notification of the status of the program
- Programmable by Infra Red
- Time remaining countdown

WASHERS FEATURES

- Stainless steel outer and inner drum
- Industry-leading 440 G-Force extraction removes more moisture, minimizing drying times and utility costs
- Suspension with new out-of-balance logic
- Soap box with four compartments
- Drain pump or drain valve optionally available
- Electrical heating or boiler-fed
- Soap supply injection allows easy connection with liquid soap pumps
- Longer lifetime: at least 15,000 cycles

DRYERS FEATURES

- Galvanized steel drum
- Oversized lint filter located in front for easy cleaning
- Powerful exhaust blower assures short drying times and low operating costs
- Electrical or gas heating



STACKED WASHER-DRYER


	NTW				
	NT3JGASP403UG01	NT3GAJP403UG43	NT3GAJG403UG43	NT3JGASP403NG22	NT2JGASP403UG01
Market	Europe/CE	Europe/CE	Europe/CE	No agency	Europe/CE
Actuation	OPL ¹ / PCP ²	OPL ¹ / PCP ²	OPL ¹ / PCP ²	OPL ¹ / PCP ²	OPL ¹ / PCP ²
Heating	Electric	Electric	Electric	Electric	Electric W - Gas D
Voltage	400V/50Hz/3N	400V/50Hz/3N	400V/50Hz/3N	400V/50Hz/3N	400V/50Hz/3N
Basket	Stainless	Soap inject./grey boot	Soap inject./grey boot	Stainless	Stainless
Drain	Pump	Pump	Gravity Drain ³	Pump	Pump

¹OPL On Premise Laundry ²Prep for Central Pay ³Available in Q4/2024

		Washer
CAPACITY	kg	10.5
DRUM VOLUME	l	96,8
MOTORS		
Frequency controlled	kW	0,67
EXTRACTION SPEED	rpm	1200
G-FACTOR		440
ELECTRICAL HEATING		
Electrical	kW	4,8

		Dryer
CAPACITY	kg	10.5
DRUM VOLUME	l	198
MOTORS		
Frequency controlled	kW	0,67
ELECTRICAL HEATING	kW	5,2 (230V) 5,3 (400V)
GAS HEATING	kW	7,3
MOTOR POWER	kW	0,25

		Stacked washer-dryer
HEATING		3 ph W, 3 ph D
VOLTAGE		400v/50Hz/3N
CONTROL TYPE		Quantum
CONTROL LOCATION		10° front control
COLOR		Grey
BASKET		Stainless/Galvanized
DIMENSIONS H×W×D	mm	1986×683×704
Net weight	kg	177
TRANSPORT DATA		
Volume (packed)	m³	1,25
Packed H×W×D	mm	2032×760×860
Gross weight	kg	193

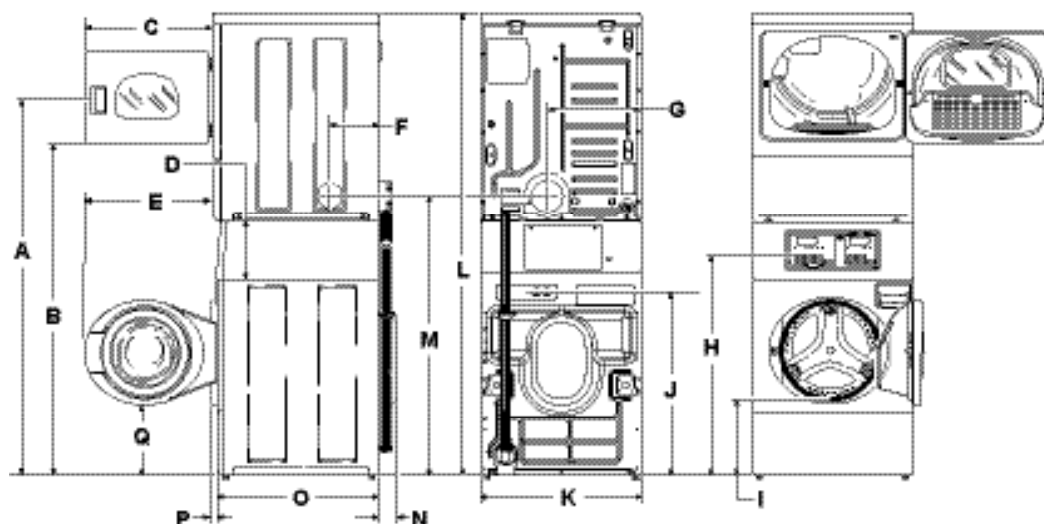

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
mm	1678	1447	597	213	610	203	391	938	371	813	683	1986	1184	52	704	38	333

STACKED DRYER

	NTD	
	NS3NGAGS403UG01	NSGNGAGS303UG01
Market	Europe/CE	Europe/CE
Actuation	OPL ¹ / PCP ²	OPL ¹ / PCP ²
Exhaust (mm)	102	102
Voltage	400V/50Hz/3N	230V/50Hz/1N
Heating	Electric*	Gas

¹OPL On Premise Laundry ²Prep for Central Pay

		Dryer
CONTROL TYPE		Quantum
CONTROL LOCATION		10° front control
COLOR		Grey
CAPACITY	kg	10.5
DRUM VOLUME	l	198
ELECTRICAL HEATING	kW	5,2 (230V) 5,3 (400V)*
GAS HEATING	kW	7,3
MOTOR POWER	kW	0,25

		Stacked dryer
DIMENSIONS H×W×D	mm	1986x683x737
Net weight	kg	120 (el.) /125 (gas)
TRANSPORT DATA		
Volume (packed)	m³	1,30
Packed H×W×D	mm	2032×760x860
Gross weight	kg	127 (el.) /132 (gas)

